
grandimpiant

GI 1218 - GI 1418 IRONER MORE EFFICIENCY

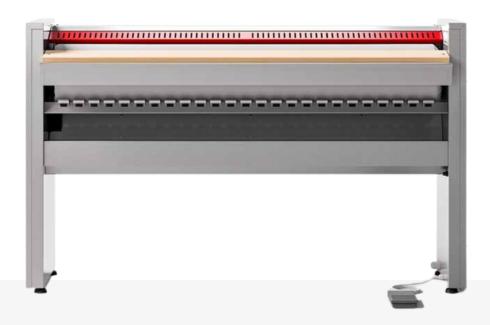

The new GI 1218 / GI 1418 ironing roller model combines small size with professional performance and high ironing quality.


- · Ironing plate made of aluminum
- FOX basic electronic temperature control
- Thermal insulation from ceramic material
- The drum of the cylinder is coated with a triple layer, made of steel wire and wrapped in soft fabric.

The multi-voltage and multi-frequency electrical connection makes the equipment extremely versatile.

Every detail of the new GI1218 / GI1418 ironing rollers has been designed to provide the operator with the most comfortable working position.

ma.

Clearly, the new GI1218 / GI 1418 ironing roller is what you need for the highest quality professional ironing.



With the new Multipoint Contact Thrust System, the number of thrust points along the entire length of the ironing plate is increased, ensuring excellent ironing performance at every point of the roller. Great flexibility in ironing and due to the presence of a control that adjusts the intensity of the push.



Fox electronic control

The FOX control system is perfect, thanks to 4 temperature levels which allow maximum flexibility without needing special skills or knowledge.

GI 1218 / GI 1418 IRONER

| | Model | GI 1218 | GI 1418 |
|--------------------------|---------------------|--------------------|----------|
| | | | |
| Basin movement | | Manual | |
| Roller speed control | | FOX Basic | FOX |
| | Capacity | | |
| at UR 10/15% | | 25 | 34 |
| | | | T |
| Type of heating | | Electric | Electric |
| Cylinder dimernsions and | l data | _ | |
| | Length (mm) | 1200 | 1400 |
| | Diameter (mm) | 180 | 180 |
| | Speed (m/mm) | 2,5 | 1,2/2,5 |
| Net dimensions and packi | ng | _ | |
| Net dimensions | Μήκος (mm) | 1410 | 1610 |
| | Βάθος (mm) | 395 | 395 |
| | Ύψος (mm) | 1070 | 1070 |
| Packing dimensions | Μήκος (mm) | 1520 | 1720 |
| | Βάθος (mm) | 530 | 530 |
| | Ύψος (mm) | 1310 | 1310 |
| | Ογκος (m3) | 1,055 | 1,194 |
| Weight | Καθαρό / Μικτό (kg) | 105/116 | 123/142 |
| | V/ ph / Hz | 230-240V 3~50/60Hz | |
| Electric supply | | 380-415V 3~50/60Hz | |
| | | 440-480V 3~60Hz | |
| Heating power | kW | 4,5 | 5,4 |
| Total power | kW | 4,68 | 5,58 |
| Fuse | A | 8/12 | 10/12 |
| Noise | Db | 60 | 60 |

EASYWASH I.K.E.